














LOAD BANK KPLB-6250



KEYPOWER LOAD BANK:

- * Frequency: 50/60 Hz;
- * Voltage range: AC 110-690V;
- * Duty: Continuous;
- * Cooling system: Industrial grade axle fans;
- * Discharged air direction: horizontal for 100 kw, vertical for larger models;
- * Control power phase: Single-phase, two-wire for 500 kw and below; three-phase, four-wire for larger models.

GENERAL SPECIFICATIONS		
	Model	KPLB-6250
	Capacity	6250KVA / 5000kW
	Type of load	Resistive & inductive load
	Power factor	0.8 / 1.0
	Duty cycle	Continuous
	Cooling system	Industrial grade axial fan
	Cooling mode	Forced air-cooled
	Airflow	Vertical discharge
	Phase	Available at both single and three phase
	Rated testing voltage	3P3W 110 - 690V
	Rated frequency	50Hz / 60Hz
	Number of fans	16
	Control power input voltage	3P4W 220 - 480V



FREQUENCY



DRY TYPE



FORCED AIR COOLED



SOUNDPROOF




CERTIFICATION



ISO 9001

Dimension and Weight

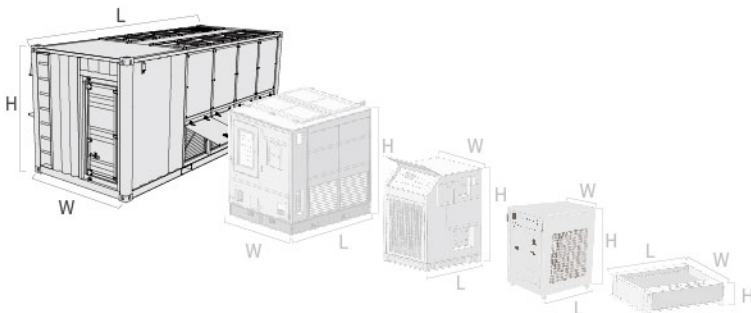





1500-6000KW

200-1400KW

100KW

50KW

3-10KW

DIMENSION		KPLB-5000
	Length (L)	mm 12192
	Width (W)	mm 2438
	Height (H)	mm 2896
	Weight	kg 32000

KEYPOWER has the right to modify any feature without prior notice. Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.

Technical Specifications

PERFORMANCE PARAMETER	
Ambient Temperature	-10°C ~ +55°C
Relative Humidity	≤98% ventilated environment without explosive or corrosive dust
Altitude	≤3000m above sea level
Wire Connection	Socket / Terminal
Load Tolerance (each step)	±5%
Load Tolerance (overall)	±3%
Enclosure	ISO 40HC Container
Parameter measuring accuracy grade	0.5
Noise level	86 dBA @ 1m
Enclosure protection class	IP 54
Forklift handling	No

CONTROL PANEL	
Control mode (Standard)	Local manual control
Control mode (Optional)	Intelligent / remote control
Remote control distance	≤100 m
Load step	10kW*4, 20kW*3, 50kW*2, 100kW*8, 200kW*20 / 8kvar*4, 15kvar*3, 38kvar*2, 75kvar*8, 150kvar*20 (non-intelligent type) 10kW*13, 20kW*6, 50kW*7, 100kW*6, 200kW*19 / 8kvar*13, 15kvar*6, 38kvar*7, 75kvar*6, 150kvar*19 (intelligent type)
Load bank protections	Fan failure alarm/Overload alarm/Overvoltage alarm/Overheating alarm/Low airflow alarm/Maintenance door open alarm/Control power failure/Fault reset
Multi functions display	voltage, current, load power, reactive power, apparent power, power factor, frequency etc.
One-step load/unload	Yes
Emergency stop	Yes
Phase sequence indicator	Yes

Optional Items for Load Bank:




- Capacitive/Inductive/Resistive load bank with different power factor
- Intelligent control
- Laptop for remote control
- Generator tester
- Multi-voltage
- Water-proof cover for air outlet (200-1400KW)
- Air deflecting duct for containerized load bank
- Space heater
- Cable connector
- Galvanized sheet canopy
- Wheels for < 500KW load bank
- Trailer

RESISTOR FEATURES		304 STAINLESS STEEL RESISTORS
Material	Stainless steel	
Cooling mode	Forced air cooling	
Temperature resistance	500 ~ 600°C	
Load Tolerance	±5%	
Warranty	3 years with unlimited hours	

INDUCTOR FEATURES		INDUCTIVE TYPE
Insulation level	Class H	
Operating temperature	-25 ~ 60°C	
Flame retardant rating	UL94 - V0	
Surface treatment	Conformal coating	
Fastener treatment	Hot-dip galvanized	
Overall treatment	Vacuum impregnation varnish	

Control Panel

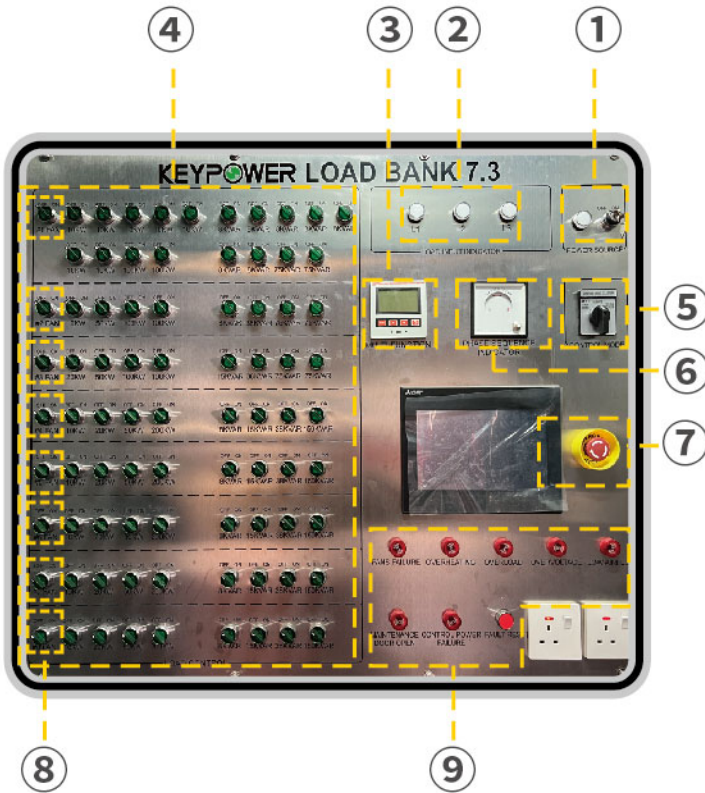

MANUAL CONTROL	FUNCTION
① Turn on / off power source	Tested power source input
② Load input indicator	Indicate U V W load input normal or not
③ Multi-function meter	Show testing parameters
④ Master load on / off	One step loading / unloading
⑤ Control mode selection	Choose control mode: Local manual control / Touch screen control / Remote control
⑥ Phase sequence indicator	Indicate phase sequence of tested power right or not
⑦ Emergency stop button	Emergency stop
⑧ Load Steps	Loading / unloading

⑨ Alarm
Load bank protection: Fan failure alarm / Overload alarm / Overvoltage alarm / Overheating alarm / Low airflow alarm / Maintenance door open alarm / Control power failure

In addition to all manual control functions, Intelligent/remote control also contains the following functions:

- Touch screen control/remote control
- Auto loading/unloading test
- Data setting

Intelligent control system with **Mitsubishi**[®] PLC



KEYPOWER Fuzhou GFF KEYPOWER Equipment Co., Ltd.

MANUAL	LL VOLTAGE		CURRENT		P / Q / S / POWER			
	Uab	0 V	a	0 A	P	0 KW	COStg	0.00
	Ubc	0 V	b	0 A	Q	0 KVAR	FPF	0.0 HZ
AUTO	Uac	0 V	c	0 A	S	0 KVA	ON LOAD	0 MIN
	RATED POWER: 1000 KW <input type="checkbox"/> CONFIRM		LOAD SETTING		① 0 KW	② 250 KW	③ 500 KW	
SETTING	<input type="button" value="START"/> <input type="button" value="PAUSE"/> <input type="button" value="STOP"/>		ON LOAD DURATION		④ 750 KW	⑤ 1000 KW	⑥ 1100 KW	
	PF CHOICE: <input type="button" value="PF=1.0"/> <input type="button" value="PF=0.8"/>		OFF LOAD DURATION		⑦ 1 MIN	⑧ 5 MIN	⑨ 5 MIN	
ALARM	SENSET RATED VOLTAGE: 0 V				⑩ 10 MIN	⑪ 10 MIN	⑫ 10 MIN	
					⑬ 1 MIN	⑭ 1 MIN	⑮ 1 MIN	

Intelligent Control Interface